Spengler Cardiology introduces the brand new born of its range **Cardiomate**, the new generation of ECG:

Cardiomate EVI

THE ECG TABLET 100% AUTONOMOUS!



With its neat design and compact size, EVI is an intuitive and ultra convenient ECG.

Transportable to any department and to the bedside of any patient. Ideal for office use, as well as in the hospital, moving from one room to another, and also very suitable for emergency transport.

Cardiomate EVI has the same performance as the other ECGs of the range **Cardiomate** with a sampling frequency of 32000Hz which gives it a detailed recording of the electrical activity of the heart.

2 sizes of screen 7" and 10" allowing at the same time the tracing on 12 leads as well as the interpretation, and not necessarily requiring printing, for a more ecoresponsible approach.





SINCE 1907



Spengler S.A.S | 30 rue Jean de Guiramand | 13290 Aix en Provence | FRANCE

www.spengler.fr

Tel : **+33 (0)4 42 52 89 80** Mail : **export@spengler.fr**

ECG TABLET Cardiomate EVI



A TABLET 100% AUTONOMOUS

- 2 sizes : 7" or 10".
- 7" Tablet: ECG 12 leads.
- 10" Tablet: ECG 12 or 18 leads + rechargeable & recorder base.



A FORMIDABLE ACCURACY

- One of the highest sampling rates on the market: 32000Hz.
- Automatic detection and marking of the pacemaker.
- 12-lead ECG or 18-lead ECG possible.



INTUITIVE AND EFFICIENT

- High resolution 7" or 10" touch screen with keyboard for editing comments on the electrocardiogram.
- Real-time visualization of the 12 ECG leads on the tablet along with automatic interpretation and interval calculations (without using a computer or printer), for a more responsible approach.
- Digital touch signature.



ACCESSIBLE DATA

- Internal memory of 10000 files allowing to store, recall, edit, print patient data.
- Data export via wifi or USB port in pdf or xml format.
- Optional PC ECG software to analyze patient data.
- Integration with clinical database systems and hospital management systems.



EASY TO PRINT

- Impression of the 12 leads: - simply on your network printer via wifi for the
- 2 tablets,
- or on the thermal printer of the base for the 10".



STAND ALONE


An ultra-compact design and transportability displayed with: - protective shell for the 7",

- desk support for the 10".



A GREAT AUTONOMY

 Both tablets are equiped with a battery of 5000 mAh for an autonomy of at least 12 hours.

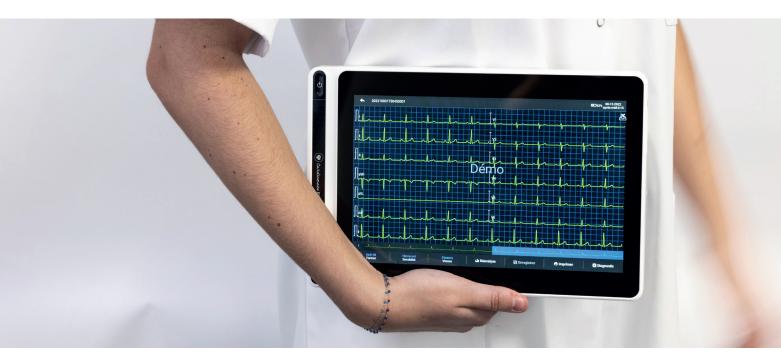



Tel.: +33 (0)4 42 52 89 80 Mail: export@spengler.fr

ECG TABLET Cardiomate EVI

TECHNICAL FEATURES

Heart rate range	30bpm~300bpm	Input impedance	≥100MΩ (10Hz)
•		Input circuit	
Accuracy	±l	current	≤10nA
Lead	Acquisition of 12-lead Cardiomate EVI 7" and 10" (12 leads) Exists in acquisition of 18-lead Cardiomate EVI 10" (18 leads).	Calibration voltage	1mV±2%
A/D conversion	24 bits	Depolarization voltage	±900mV. ±5%
Sampling rate	32000 samples/Sec	Noise	≤12.5µV
Common mode rejection ratio	≥140dB (AC filter on) ≥120dB (AC filter off)	Amplitude quantisation	0.95µV/LSB
Time constant	≥5s	Recovery time after defebrillation discharge	<10s
Frequency response	0.01HZ~350HZ (+0.4db-3.0db)	Pacer pulse display	Pace beat with an amplitude of ±2mV~±700mV, duration of 0.1ms~2.0ms, A-5 rising time under100µs, and frequency of 100/ min can be displayed on this ECG recording.
Sensitivity	Auto, 2.5 mm/mV, 5 mm/mV, 10 mm/mV, 20 mm/mV, 40 mm/mV, less than ±5% error	Minimum detectable signal	20µVp-р
Filter	AC filter: 50Hz, 60Hz, Off	10.1" Tablet	Size: 272.6mm(L) x 181.2mm(W) x 25.8mm(H) Net weight: 1.2kg
	EMG filter: 25Hz, 35Hz, 45Hz, Off		
	ADS filter: 0,01Hz, 0,05Hz, 0,32Hz, 0,67Hz		
	Low pass filter: 75Hz, 100Hz, 150Hz, 300Hz, Off		
Paper printing Speed	5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s, 25mm/s et 50mm/s, less than ±3% error	10.1" Tablet base	Size: 274mm(L) x 288mm(W) x 111.2mm(H) Net weight: 2.5kg
Analysis algorithm	Glasgow algorithm	7" Tablet	Size: 197mm(L) x 112.4mm(W) x 26.1mm(H) Net weight: 0.8kg
Included	 7" Tablet: 1 tablet + shell, 1 patient cable, 4 clamps (terminal electrode), 6 suctions balls (chest electrode), 1 power cable, 1 USB key (USB-C USB-A), 1 user manual. 10" Tablet: 1 tablet + printing base, 1 patient cable, 4 clamps (terminal electrode), 6 suctions balls (chest electrode), 1 power cable, 1 roll of paper, 1 user manual. 		
SPENGLER WARRANTY ADDITIONAL WARRANTY	3 YEARS		

REFERENCE
260 050
260 051
260 060
260 070
260 071
260 072
260 073
260 061
260 023

SPENGLER quality

CE Marking

EEC European Directive 93/42: Class IIa. The Cardiomate® meets the essential safety, health, hygiene and environmental protection.

www.spengler.fr

After sales service

Spengler SAS provides maintenance and repair of equipment. Go to the Spengler website in the Contact section.

Spengler Warrantly

The Cardiomate EVI is guaranteed 3 years under normal conditions of use. The warranty does not cover wearing parts, shocks

and mainteance defects made by the user.

Spengler S.A.S | 30 rue Jean de Guiramand | 13290 Aix en Provence | FRANCE